

IP54



WATERPROOF

Series 7R & 7L

Waterproof electric strikes are designed for **outdoor installations** particularly in wet or dusty areas. The curved design of the base of the box allows the installation of locks where the separation between the latch and the first bolt is only 5 mm.

The model with monitoring operates by magnetism and it is an O&C patented system which ensures the insulation of the reed box.

DC models are equipped with electronic protection in order to prevent damages to your access control system. This also represents an advantage for the installer as the connection is not polarized.

Manufactured for right and left opening doors and featuring a wide variety of functions and voltages, these strikes quickly unlock standard doors through low power consumption.

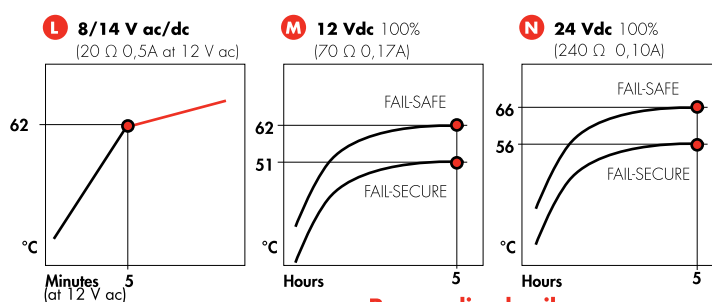
Technical features

- Max. side-load on AC: 160 N
Max. side-load on DC: 10 N
- Break-in resistance: 5.000 N
- Operating temperature range: -15 °C / +40 °C
- Housing: Zamak
Keeper: Zamak
- Guaranteed 3 years
- Complies with 2004/108/CE (EN 55014)
- Corrosion resistant according to UNI ISO 9227

Certifications


- IP 54 certified (protected against dust and water)







Coil features



Personalized coils upon request

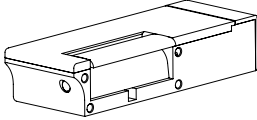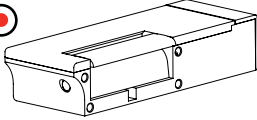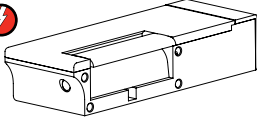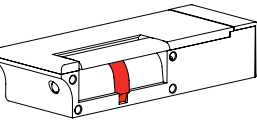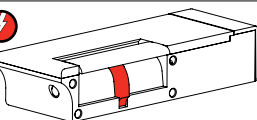References and features



	Fixed keeper	Side-load	Electronic protection	Voltage	References DIN right add faceplate	References DIN left add faceplate
 Fail-secure	●	●		8-14 V ac/dc	7R0.4.00.L	7L0.4.00.L
	●		●	12 V dc	7R0.4.00.M	7L0.4.00.M
	●		●	24 V dc	7R0.4.00.N	7L0.4.00.N
 Internal Hold-open	●	●		9-14 V ac/dc	7R2A.4.00.L	7L2A.4.00.L
 Fail-safe	●		●	12 V dc	7R4.4.00.M	7L4.4.00.M
	●		●	24 V dc	7R4.4.00.N	7L4.4.00.N
 Fail-secure with monitoring	●	●		8-14 V ac/dc	7R6.4.00.L	7L6.4.00.L
	●		●	12 V dc	7R6.4.00.M	7L6.4.00.M
	●		●	24 V dc	7R6.4.00.N	7L6.4.00.N
 Fail-safe with monitoring	●		●	12 V dc	7R8.4.00.M	7L8.4.00.M
	●		●	24 V dc	7R8.4.00.N	7L8.4.00.N
 REED			Maximum voltage	100 V DC		
			Maximum current	0,3 A		
			Maximum power	3 W		

Recommended Faceplates

SHORT	LONG
76 Inox	68 Inox
	69 Inox
	75 Inox

Dimensions

